





The VRC-60 is all about peak performance. The cartoner is particularly popular with pharmaceutical companies and contract manufacturers because it can do so much while taking up very little space.

- Vacuum-assisted handling helps protect high-quality, thin-walled paperboard cartons
- ✓ Easy to integrate due to minimal 44" x 43" footprint
- ▼ Tool-free changeover between sizes
- ✓ Optional labeling (QR code, RFID tag, etc.)

Details



Small and Fast

Generates an output of 60 cartons per minute on a compact 44" x 43" footprint – saving you time and space.



Delicate Carton Handling


Precisely sized buckets with suction cup mechanism hold cartons in place, gently guiding them throughout the cartoning process – perfect for keeping thin walled and fragile paperboard cartons clean.



QC & Check Weighing

Ability to add quality control features such as weighing technologies or cameras.

Process Illustration

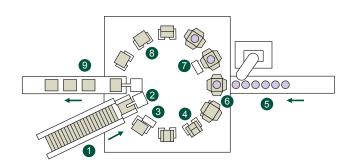

- 1 Carton infeed
- 2 Carton forming
- 3 Glue application
- 4 Bottom sealing
- **5** Product infeed
- 6 Product loading
- **7** Gluing station
- 8 Top sealing
- 9 Carton exit

Technical data VRC-60

The technical data may vary, depending on the container dimensions and shapes, the product to be filled, the machine configuration and material specifications.

| Carton Length Range | Carton Width Range | Carton Height Range | Magazine Capacity | Output/min | Output/h | Product Size Requirement |
|-------------------------|-------------------------|------------------------|--------------------|------------|-------------|-----------------------------|
| 0.5"(13mm) 5"(127mm) | 0.5"(13mm) 4"(101mm) | 2"(50mm) 15"(380mm) | Up to 700 cartons* | Up to 60 | Up to 3,600 | Per project specifications |

| Size (LxWxH) | Weight | Power Requirements | Air Requirements |
|--|-----------------------|--------------------|------------------|
| 44" (1.11 m) x 43" (1.09 m) x 81" (2.05 m) | 1,300 kg 2,800 lbs | 230 V/20A 60 Hz | 90 PSI @ 10CFM |